

केंद्रीय माध्यमिक शिक्षा बोर्ड, दिल्ली
सीनियर स्कूल सर्टिफिकेट परीक्षा (कक्षा बारहवीं)
परीक्षार्थी प्रवेश-पत्र के अनुसार भरे

PHYSICS(042)

Date of examination 05.03.2013 Tuesday

Language of the paper English

Roll No. as written on the top
of the paper :

55/2

Supplementary answer -book(s) used

NIL

Category of disability, if any, tick the category

B D H S C

B = Blind, H = Physically Handicapped, S = Spastic, C = Cerebral
D = Dumb

Supplementary answer provided : Yes / No

NO

*एक क्षण में एक अक्षर लिखें। नाम के प्रत्येक भाग के बीच एक खाना रिक्त छोड़ दें। यदि परीक्षार्थी का नाम 24 अक्षरों से अधिक है तो केवल नाम के प्रथम 24 अक्षर ही लिखें।

Each letter be written in one box and one box be left blank between each part of the name. In case Candidate's Name exceeds 24 letters, write first 24 letters.

For office use

सनियर स्कूल सर्टिफिकेट परीक्षा (कक्षा बारहवीं)
 SENIOR SCHOOL CERTIFICATE EXAMINATION (CLASS XII)

केन्द्रीय माध्यमिक शिक्षा बोर्ड, दिल्ली
 CENTRAL BOARD OF SECONDARY EDUCATION, DELHI



प्रमाणित किया जाता है कि मैंने / हमने इस उत्तर-पुस्तिका का मूल्यांकन प्रश्न पत्र के प्रामाणिक सेट के अनुसार और पूर्ण रूप से मूल्यांकन पद्धति के अनुसार किया है।
 Certified that I/we have evaluated this answer book according to the correct set of question paper and strictly as per the marking scheme.

	संख्या	समस्याएं
परीक्षक		
Exa		
समन्वयक		
Co-		
मुख्यालय		
Head		
(if ch		

1. ① if distance increased, Mutual inductance decreases

② No of turns increased, Mutual inductance increases

2.

$$\lambda = \frac{h}{p}$$

$$\lambda = \frac{h}{\sqrt{2m(K \cdot E)}} = \frac{h}{\sqrt{2m q V}}$$

3. Net emf = E . Hence current = $\frac{E}{R}$

4. Flux = $\frac{-3Q + 2Q}{\epsilon_0} = \frac{-Q}{\epsilon_0}$

5. $r = \frac{\Delta V}{\Delta I}$ Hence resistance -ve in BC

As $\Delta V > 0$ $\Delta I < 0$

3×10^9

$$8 \times 10^{13} \text{ Hz} - 8 \times 10^{17} \text{ Hz}$$

$$\frac{0.75 \times 10^{15}}{75 \times 10^{18} \text{ H}_2}$$

$$\frac{3}{x+10} \cdot \frac{1}{x+10}$$

$$\frac{3 \times 10^8}{10^{-9}}$$


- ⑦ When The. electromagnet is is switched on. The disc. experiences a sudden change in magnetic flux. Thus following Lenz's Law. The current induced due to the changing flux produces the motion in a magnetic ~~flux~~^{field}. The disc jumps to increase the distance from the coil & hence oppose the changing flux.

- ⑧ Activity of radioactive substance is The number of ~~the~~ radioactive nuclei of that substance disintegrating per unit time.

Its S.I unit is ~~Bq~~ ~~(becquerel)~~ ~~(becquerel)~~

$\alpha = -\frac{dN}{dt}$. Its S.I unit is Bq (becquerel)

1 Bq = 1 disintegration per second (s^{-1})

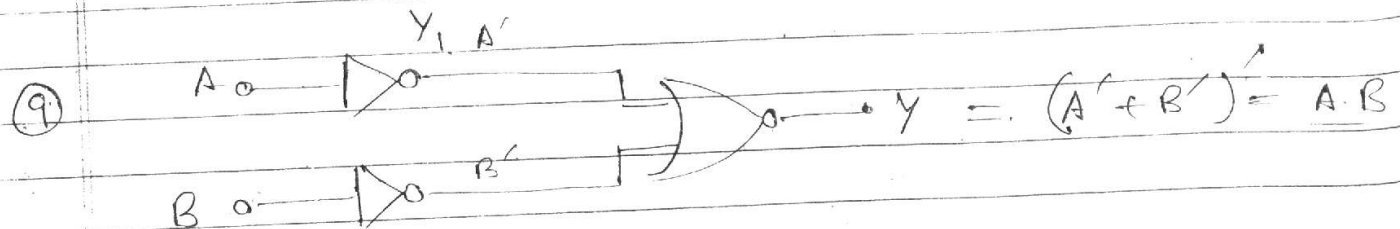


It is AND Gate



Truth Table : —

A	B	$Y = A.B$
1	0	0
0	0	0
0	1	0
1	1	1

(16)

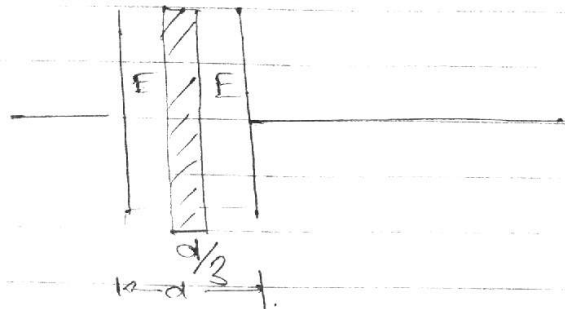

Now potential between the plates must be const.

If E be the electric field, A the area of the plate. Then, & V the potential difference then,

$$V = E \frac{2d}{3} + \frac{E'}{K} \frac{d}{3}$$

$$= \frac{Ed}{3} \cdot \left(2 + \frac{1}{K} \right)$$


But, $E = \frac{Q}{A \epsilon_0}$ $Q = \text{Charge on Capacitor}$

$$V = \frac{Qd}{A \epsilon_0} \cdot \left(\frac{2}{3} + \frac{1}{3K} \right)$$

But $Q = CV$ Where $C = \text{Capacitance}$,

$$C = \frac{\epsilon_0 A}{d \left(\frac{Q}{3} + \frac{1}{3K} \right)}$$

$$= 8.801 \text{ A}$$

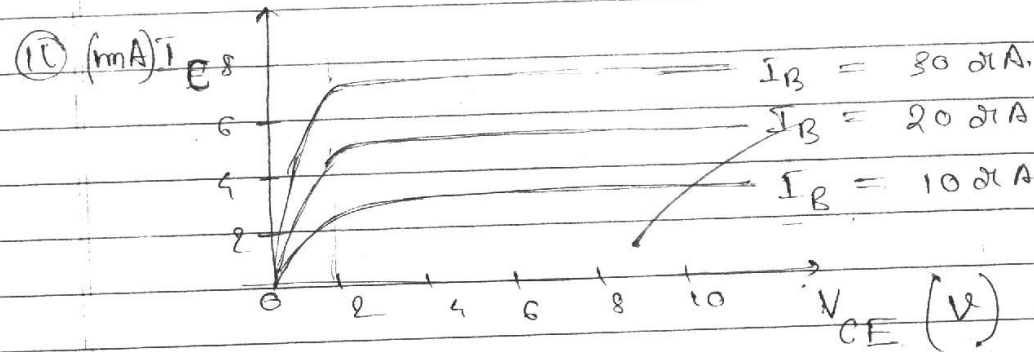


Output resistance is given by $\left(\frac{\Delta V_{CE}}{\Delta I_C} \right)_{I_B}$

The portion of graph which is linear gives us r_o output resistance.

In the straight portion (|| to X axis) $\Delta I_E \rightarrow 0$

Hence $R_{\text{output}} \rightarrow \infty$ (very High $\sim 10^5 \Omega$) as The Collector Base junction is reverse biased in this region.

(12)

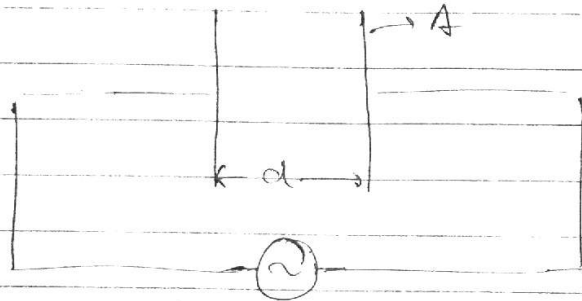

$$\hat{i} = i_0 \sin \omega t, \quad v = v_0 \sin \omega t$$

The charge is given by $q = C \cdot v$

$$\text{Now, } i_c = \frac{d}{dt} (C v_0 \sin \omega t) = C v_0 \omega \cos \omega t = v_0 \omega C \sin(\omega t + \frac{\pi}{2})$$

$$\text{As } X_c = \frac{1}{\omega C}, \quad \text{phase diff} = \pi/2$$

$$\therefore \text{Electric field} = \frac{Q}{A \epsilon_0}$$

$$\therefore i_d = \epsilon_0 \frac{d\phi_E}{dt} = \frac{\epsilon_0 A dQ}{A \epsilon_0 dt} = \frac{dQ}{dt}$$

$$= V_0 \cos \omega t$$


$$= i_c$$

(13) $a \sin \theta = \lambda$ for first minima

$$\theta = \left(\frac{\lambda}{a} \right)$$

for first minima

$$a \sin \theta = \lambda$$



$$a = \frac{3 \times 10^{-3}}{1.2 \times 10^9} = 600 \times 10^{-9}$$


$$a = \frac{240 \times 10^{-6}}{m} = 2.4 \times 10^{-4} m$$

(14) A $\rightarrow$ Square Law device :- Squares the wave and produces an out-put of the form $\rightarrow B \cdot x(t) + C \cdot x(t)^2$.

B $\rightarrow$ Band Pass filter :- It is centred at ω_c meaning it allows only the components with frequency ω_c , $\omega_c + \omega_m$ & $\omega_c - \omega_m$ to pass through it. Other frequencies & D.C components are blocked.

(15) Drift velocity (V_p) is The ^{Average} uniform velocity with

which the electrons move. The path in a conductor in a conductor under an applied external electric field in the conductor, between two successive collisions.

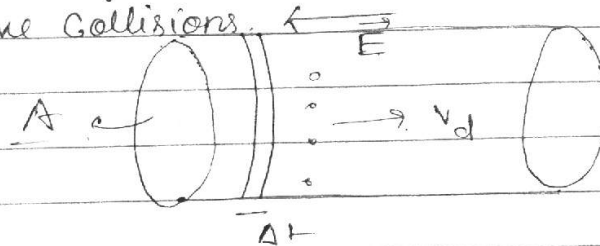

Let A be area of cross section in the section


$n \rightarrow$ no. of electrons per unit volume, $i =$ current,

Then,

$$i = \frac{\Delta Q}{\Delta t} \quad \Delta Q = \text{charge passing a unit area.}$$

$$= \frac{n A e v_d \Delta L}{\Delta t} \Rightarrow \boxed{i = n A e v_d}$$

(16)

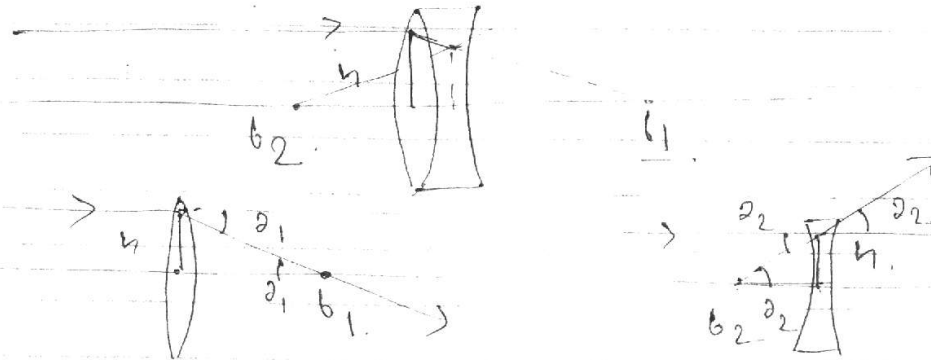

Now As can be seen let a parallel ray be incident. Then deviation produced by the Convex lens alone is $\alpha_1 = \frac{h}{b_1}$


& by Concave lens is $\alpha_2 = -\frac{h}{b_2}$ as in opposite direction.

Then deviation by Equivalent Lens is $\alpha = \frac{h}{b}$

$$\alpha = \frac{h}{b} = \alpha_1 + \alpha_2 = \frac{h}{b_1} - \frac{h}{b_2}$$

$$\frac{1}{b} = \frac{1}{b_1} - \frac{1}{b_2} \Rightarrow \frac{1}{b} = \frac{b_2 - b_1}{b_1 b_2}$$

$$b = \frac{b_1 b_2}{b_2 - b_1} \rightarrow \text{Ans}$$

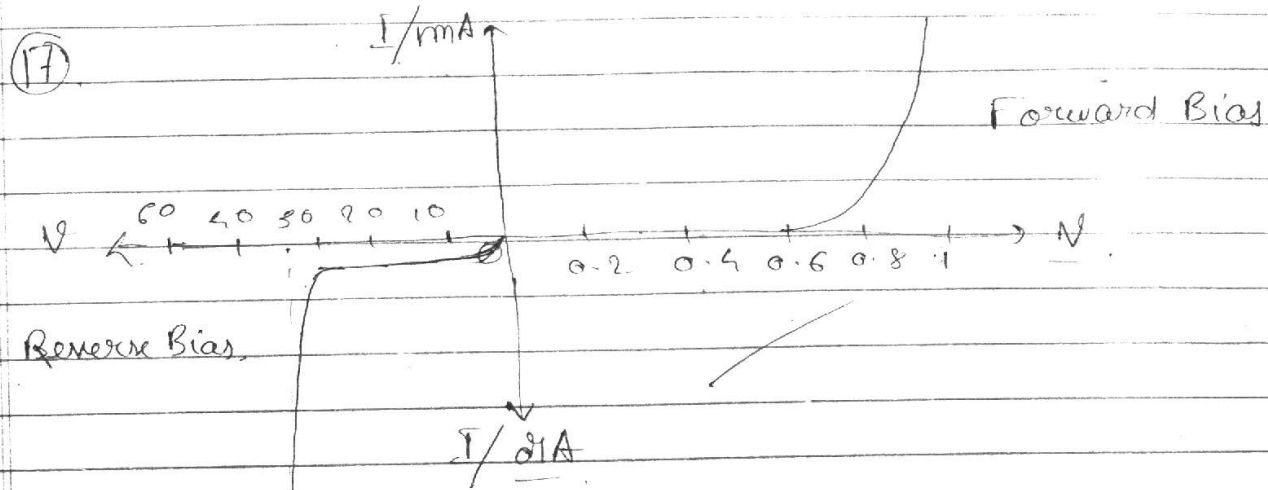

(i) Reverse Bias current is limited upto a certain volt voltage as at this stage all the minority ~~carriers~~ ^{carriers} responsible for reverse current is used and no further minority carrier is available. That is it is saturated.

(ii) At the critical voltage called Break down voltage field ionisation takes place that is not ~~is~~ not

electrons are ripped apart from host atoms by strong electric field and accelerated from p-side to N-side leading to a surge in steep rise in the current.

Such a device is Zener diode.


(18) The deflection produced per unit current is called current sensitivity of galvanometer, (θ/I) . S.I unit is am A^{-1} (per a

S.I unit is A^{-1} (per ampere.)

For first. $\frac{24}{R_1} = \frac{6}{93} \Rightarrow R_1 = 6 \Omega$

For second: $\frac{6}{12} = \frac{R_2}{84} \Rightarrow R_2 = 4 \Omega$

Hence $R_1/R_2 = 6/4 = \underline{\underline{3/2}}$

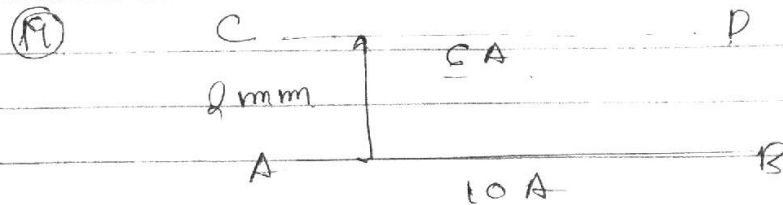


$$\text{Force per unit length} = \frac{\mu_0}{4\pi} \frac{2i_1 i_2}{r} = \lambda g$$

$$10^{-7} \times 2 \times 5 \times 10 = \frac{\lambda \times 10}{2 \times 10^{-3}}$$

$$\lambda = 6 \times 10^{-4} \text{ Kg/m}$$

The force must act upward, hence it is repulsive. Therefore current in CD is opposite to that in A.

(20)

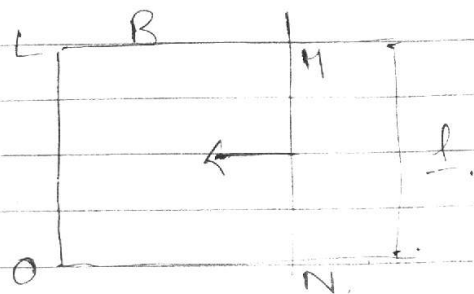

in a time Δt . The
change in length of arm
 ON & $LM = v \Delta t$.

Now $\Phi = \vec{B} \cdot \vec{A} = BA \cos 0^\circ = \underline{B \cdot A}$

$$\therefore \frac{d\Phi}{dt} = -\mathcal{E} = B \cdot \frac{dA}{dt} = \underline{\underline{B l v}}$$

As $A = l \times ON$ $\Delta A = l \times \Delta ON = l v \Delta t$	$= B l v$
--	-----------


$$\therefore |\mathcal{E}| = 10 \times 0.5 \times 20 \times 10^{-2}$$

$$= \underline{\underline{1 \text{ V}}}$$

$$i = \frac{E}{R} = \frac{1}{5} \quad A = 0.2 \text{ A}$$

(21)

Linearly polarised Light means the particles are Electric field of the wave, is ~~vibration~~ vibrating along any one axis. ~~oscillating~~ oscillating along any one axis.

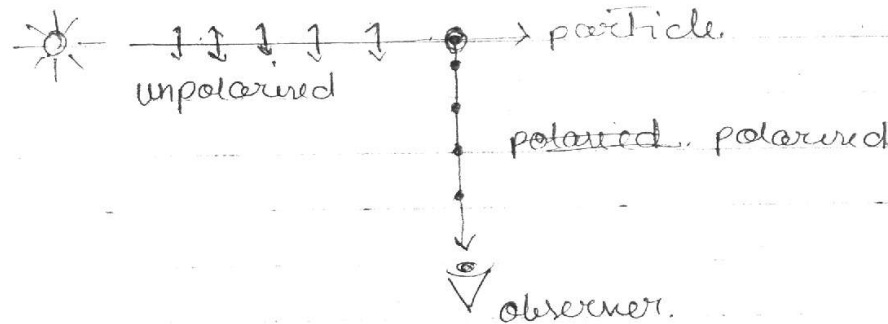

The sunlight (unpolarized) undergoes diffraction ~~not~~ by the particles of atmosphere. It is clear that if diffracted by 90° then the vibration along the observer are cancelled.

hence only the oscillations of electric field perpendicular to the plane of the page would survive. The above shown unpolarised wave after diffraction has been polarised in a direction perpendicular to the plane of this page.

(16) ~~The~~ After first polarisation the intensity would be reduced by half. However when the polaroid is rotated no further change in intensity will be there.

(22) The Eqn is :-

$$h\nu = eV_0 + \phi \quad \text{where } \phi = \text{work function of metal}$$

(i) Energy of photon is solely depends on the frequency of the light.

(ii) Intensity of the light merely

$\nu =$ frequency of Light

$V_0 =$ stopping potential

determines the no. of photons crossing per unit area, with each photon having equal energy. Energy of photon is quantised meaning ~~to~~ photons can be absorbed only in multiples of $h\nu$.

Three observed features are:—

(i) Emission is observed only above a particular frequency of light for each metal.

clearly, $eV_0 = K_{\max} > 0 \Rightarrow h\nu > \phi$

hence $\nu_{\text{threshold}} > \phi/h$

(ii) The stopping potential is dependent on frequency & not intensity.

$$eV_0 = h\nu - \phi$$

Clearly as Kinetic energy depends on frequency.
Stopping potential must depend on frequency.

(ii) Saturation current varies with Intensity.

As more Intensity means more photons available.
Hence more electrons will be released by
absorption of photons. However for lights of
different intensities but same frequency
max K.E will be same.

(23) Sky space waves used for L.O.S communication.

Range of frequencies is about 40 MHz

$$\begin{aligned} d_m &= \sqrt{2R h_T} + \sqrt{2R h_R} \\ &= \sqrt{2 \times 8 \times 64 \times 10^6} + \sqrt{2 \times 9 \times 64 \times 10^6} \\ &= (4 + 3) \times 10^3 = 56 \text{ Km} \end{aligned}$$

h_T & h_R
height of
antennae.
 R = radius of
earth.

$$(24) \quad i = i_m \sin \omega t$$

$$v = i_m R \sin \omega t$$

$$\therefore P_{inst} = i_m^2 R \sin^2 \omega t$$

$$\int_0^T P \cdot dt = \int_0^T i_m^2 R \sin^2 \omega t \cdot dt$$

~~$P_{avg} = \frac{1}{T} \int_0^T P \cdot dt$~~

$$\text{Work done} = \frac{i_m^2 R}{2} (1 - \cos 2\omega t) \Big|_0^T$$

$$= \frac{i_m^2 R}{2} \cdot T$$

$$P_{avg} = \frac{\text{Work Done}}{\text{Time}} = \frac{i_m^2 R}{2}$$

$$\textcircled{6} \quad P = \frac{V_{\text{max}}^2}{R} \Rightarrow R = \frac{240 \times 240 \times 2}{120}$$


Here Here $V_{\text{max}} = \frac{V \sqrt{2}}{\text{Ans}}$

$$\textcircled{6} \quad P = \frac{V^2}{2R} \Rightarrow R = \frac{240 \times 240 \times 2}{2 \times 120} = 240 \Omega$$

$$\textcircled{6} \quad P = \frac{V_{\text{rms}}^2}{R} \Rightarrow R = \frac{240 \times 240 \times 2}{120} = 480 \Omega \text{ Ans}$$

25

(25) (10)

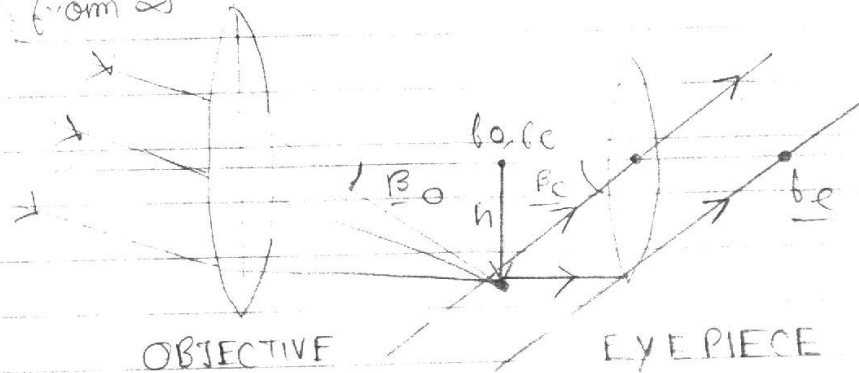Ray from ∞ 

OBJECTIVE

EYEPiece

Image at ∞

The magnification m for a telescope is the ratio of angle subtended by the image of the objective at the eye to the angle at the pole of the eyepiece to the angle subtended at the pole of the objective.

$$\therefore m = \frac{\beta_e}{\beta_o} = \frac{\tan \beta_e}{\tan \beta_o} = \frac{h}{b_e} \times \frac{b_o}{h} = \frac{b_o}{b_e}$$

f_o = focal length of objective, f_e = eyepiece.

25) two important limitations are:—

- ① Refracting lenses of large aperture are difficult to manufacture and handle. Also chromatic aberration is present.
- ② ~~Spe~~ For large aperture intensity of image is high but spherical aberration also takes place. ~~Spe~~ Spherical aberration in mirrors can be removed by ~~the~~ using parabolic mirror.

26) a) principle of Total internal reflection of optic fibres

b) The values are Concern for for for student & care of poor people.

c) The doctor is righteous & helpful towards poor

(27) Let us consider the electron revolving in a given energy state with radius r_n , energy E_n & velocity v_n .

Then, ~~the~~ Potential energy of electron is.

$$E_p = - \frac{20}{4\pi} \frac{e^2}{r_n} \quad \& \quad E_n = \frac{1}{2} m v_n^2$$

Bohr's postulate

$$m v_n r_n = \frac{n h}{2\pi}$$

no principal

$n =$ no. Principal quantum No

$$E_p \& \quad v_n^2 = \frac{n^2 h^2}{4\pi^2 m \cdot r_n^2}$$

-(1)




Fig.

Further
$$\cancel{m} \cancel{v_n^2} = - \frac{\cancel{\sigma_0}}{4\pi} \frac{e^2}{\cancel{r_n}}$$

putting value of $\cancel{v_n^2}$ from - (1)

$$\frac{\cancel{m} \cdot \cancel{h^2}}{4\pi^2 \cancel{m} \cancel{r_n}} = - \frac{\cancel{\sigma_0}}{4\pi} \frac{e^2}{\cancel{r_n}}$$

$$\Rightarrow r_n = \frac{h^2}{\sigma_0} \times \frac{4\pi}{4\pi^2 m e^2}$$

Now putting this value in Exp for P.F

& Substitution. Substituting values of constants as

$$m_e = 9.1 \times 10^{-31} \text{ Kg} ; e = 1.6 \times 10^{-19}$$

$$\text{we get } h = 6.6 \times 10^{-34} \quad \sigma_0 = 4\pi \times 10^{-7}$$

$$\text{we get } E_p = - \frac{27.2}{n^2} \quad \& \quad E_H = \frac{13.6}{n^2}$$

∴ Total Energy of electron in n^{th} orbit is.

$$E_T = E_K + E_P$$

$$= -\frac{13.6}{n^2} \quad \text{As, } n^2 > 0$$

$E_T < 0$ implies The electron is bound.

Now, When an electron makes a transition
The energy difference between two states
is equal to the energy of the photon
emitted.

$$E_i - E_f = \frac{13.6}{n_f^2} - \frac{13.6}{n_i^2}$$

$$\Rightarrow h\nu = 13.6 \left(\frac{1}{n_f^2} - \frac{1}{n_i^2} \right)$$


$$\Rightarrow v = \frac{13.6}{h} \left(\frac{1}{n_f^2} - \frac{1}{n_i^2} \right)$$

~~400800~~ $4 \rightarrow 1$: Lyman series ✓

$4 \rightarrow 2$: Balmer series ✓

$4 \rightarrow 3$: Paschen series ✓

(28)

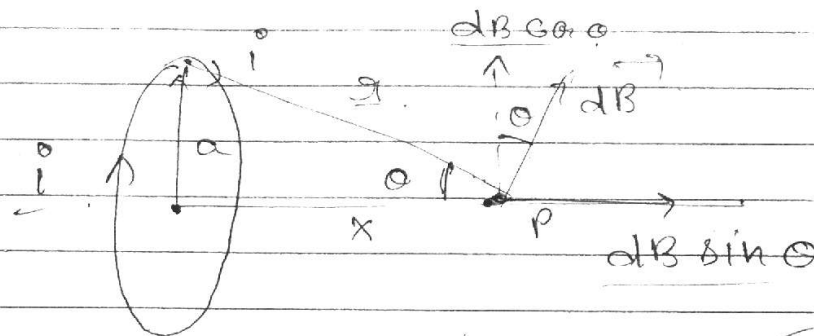

$$|dB| = \frac{\mu_0}{4\pi} \frac{i \cdot dl}{r^2}$$

Clearly component $dB \cos \theta$ cancels out over the whole loop.

Then,

$$dB \sin \theta = \frac{\mu_0 a i dl}{4\pi (x^2 + a^2)^{3/2}}$$


$$B = \frac{\mu_0 a i}{4\pi} \int_0^{2\pi a} \frac{dl}{(x^2 + a^2)^{3/2}}$$

$$= \frac{\mu_0}{4\pi} \frac{2\pi a^2 i}{(x^2 + a^2)^{3/2}}$$

if n no. of turns are present:

$$B = \frac{\mu_0}{4\pi} \frac{2\pi a^2 i n}{(x^2 + a^2)^{3/2}}$$

⑥ A Toroid is solenoid of several turns of wire joined end to end.

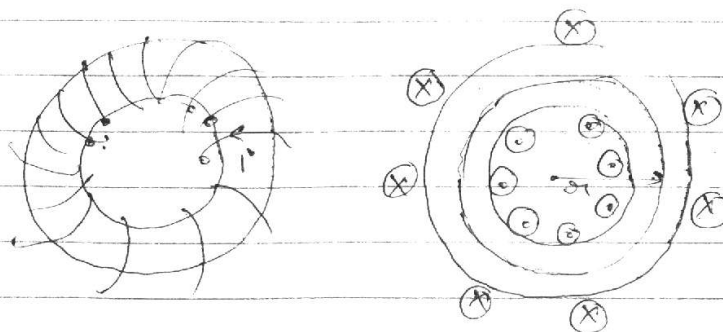

Let us consider a Amperian loop of radius r within the Toroid.

$\therefore$ From ampere's Law.

$$\oint \underline{B} \cdot d\underline{l} = \mu_0 N I \quad N = \text{no. of turns}$$

$$\therefore B = \frac{\mu_0 N I}{2\pi r}$$

in the ~~mag~~ open space $\oint \underline{B} \cdot d\underline{l} = 0$ no current


$$\text{Hence } B = 0$$

For Outside The Toroid

net current $= 0$ as current going into plane $=$ current coming out of it.

hence

$$\oint \mathbf{B} \cdot d\mathbf{l} = 0 \Rightarrow \underline{\underline{\mathbf{B} = 0}}$$

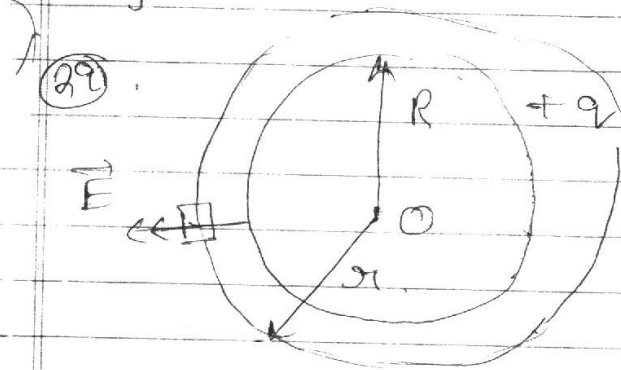

Let us consider a gaussian surface of radius r . enclosing enclosing the sphere with center which is concentric with the sphere.

A. By symmetry Electric field at

each point points in same direction is same and is along the area vector at that point.

∴ From Gauss's Law,


$$\oint E \cdot \Delta S = \frac{q}{\epsilon_0} \quad q = \text{charge of sphere}$$

$$E \times 4\pi r^2 = \frac{q}{\epsilon_0}$$

$$E = \frac{q}{4\pi\epsilon_0 r^2}$$

If Gaussian surface lies within the shell then charge enclosed by the surface must be 0 as charge lies on the surface of a conductor.

hence $\oint E \cdot \Delta S = 0 \Rightarrow \vec{E} = 0$

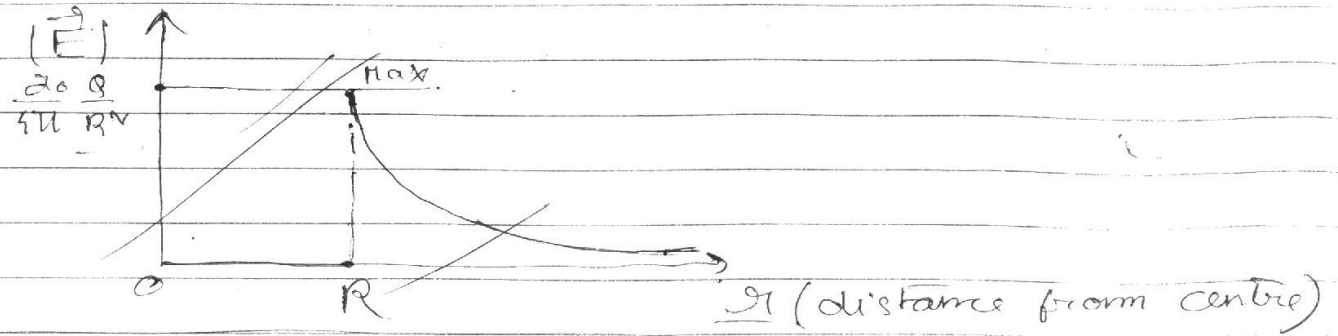

E 2013

